


Grooving and parting-off tool

TUNGCUT

Tungaloy Report No. 391S5-G

Now offers 2 mm groove widths
and inch size inserts

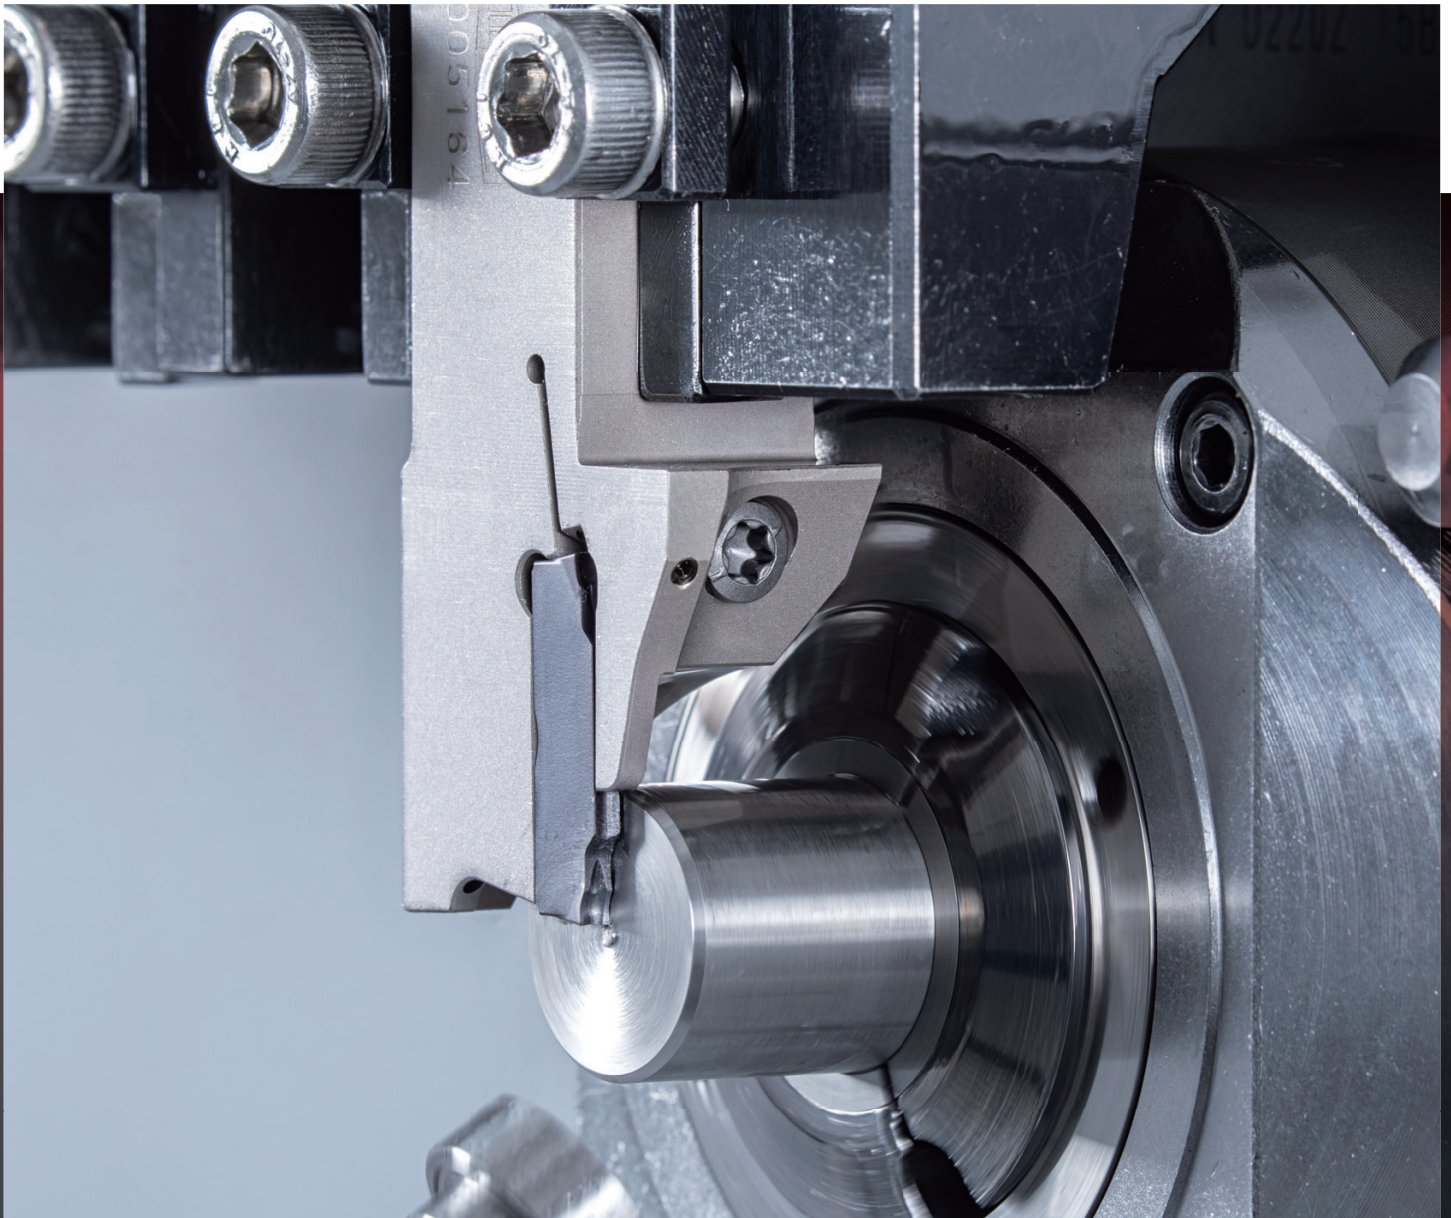




INSERT

DGM

External grooving and parting, 2 corners



P	Steel	★						
M	Stainless	★						
K	Cast iron	★						
N	Non-ferrous							
S	Superalloys	★						
H	Hard materials							


★ : First choice

Designation	Seat size	CW±0.05	RE	Coated					INSL	h
				AH7025						
DGM2.39-020	2	2.39	0.2	●					20	5
DGM3.18-020	3	3.18	0.2	●					20	5
DGM4.76-040	5	4.76	0.4	●					25	5.5
DGM6.35-040	6	6.35	0.4	●					25	5.5

● : Line up

DGS

External grooving and parting, 2 corners



P	Steel	★						
M	Stainless	★						
K	Cast iron	★						
N	Non-ferrous							
S	Superalloys	★						
H	Hard materials							


★ : First choice

Designation	Seat size	CW±0.05	RE	Coated					INSL	h
				AH7025						
DGS2.39-020	2	2.39	0.2	●					20	5
DGS3.18-020	3	3.18	0.2	●					20	5
DGS4.76-040	5	4.76	0.4	●					25	5.5
DGS6.35-040	6	6.35	0.4	●					25	5.5

● : Line up

DGL

External grooving and parting




Designation	Seat size	CW±0.05	RE	Coated							INSL	h
				AH7025								
				★								
				★								
				★								
				★								
DGL2-020	2	2	0.2	●							20	5

★ : First choice
● : Line up

DTX

External/Internal face grooving and turning




Designation	Seat size	CW±0.05	RE	Coated			Uncoated				INSL	h
				AH7025	AH8005		KS05F					
				★	☆							
				★	☆		☆					
							☆					
				★	★		★					
DTX2-020	2	2	0.2	●	●		●				20	5
DTX8-080	8	8	0.8	●	●		●				30	6.7

★ : First choice
● : Line up

DTR

Profiling and undercutting



P	Steel	★							
M	Stainless	★	☆						
K	Cast iron	★	☆	☆					
N	Non-ferrous			☆					
S	Superalloys	★	★	★					
H	Hard materials								


★ : First choice
☆ : Second choice

Designation	Seat size	CW±0.05	RE	Coated		Uncoated		INSL	h
				AH7025	AH8005	KS05F			
DTR2-100	2	2	1	●	●	●		20	5

● : Line up

STR

Profiling and undercutting, 1 corner



P	Steel	★							
M	Stainless	★	☆						
K	Cast iron	★	☆	☆					
N	Non-ferrous			☆					
S	Superalloys	★	★	★					
H	Hard materials								

★ : First choice
☆ : Second choice

Designation	Seat size	CW±0.05	RE	Coated		Uncoated		INSL	h
				AH7025	AH8005	KS05F			
STR2-100	2	2	1	●	●	●		20	5

● : Line up



www.tungaloy.com

follow us at:
facebook.com/tungaloyjapan
twitter.com/tungaloyjapan
www.youtube.com/tungaloycorporation



AS9100 Certified
78006
2015.11.04
ISO 14001 Certified
EC97J1123
1997.11.26

Distributed by:



FIND US ON THE CLOUD!
machingcloud.com

